


+  Certificato CSQ n. 9190 SIL6 80014 Giugliano (NAPOLI) Italy	Scheda prodotto	 azienda con sistema di gestione per la qualità certificato ISO 9001:2008
	PORTASCARICATORI 10 CP IDC SISTEMI DI PROTEZIONE	

Descrizione prodotto: **PORTASCARICATORI 10 CP PER MODULI IDC**




Caratteristiche:

Costituzione	Conforme alle prescrizioni tecniche TELECOM Italia C.T. 1287
MATRICOLA	NMU 236299
Caratteristiche tecniche	Molto compatto Struttura in policarbonato V0 Accetta scaricatori bipolari a bottone Pre-caricato con scaricatori 250V 10A/20KA
Applicazioni	Dispositivo di protezione che fornisce protezione primaria contro la sovratensione per i moduli di terminazione. Protegge da tensioni di fulmine provenienti da forti induzioni e da cavi di alimentazione. L'uso di QCSGAM, all'interno del modulo QCS, consente ancora la disconnessione e il test di ogni singola coppia, nonché la terminazione del cavo sul lato "cross connect"

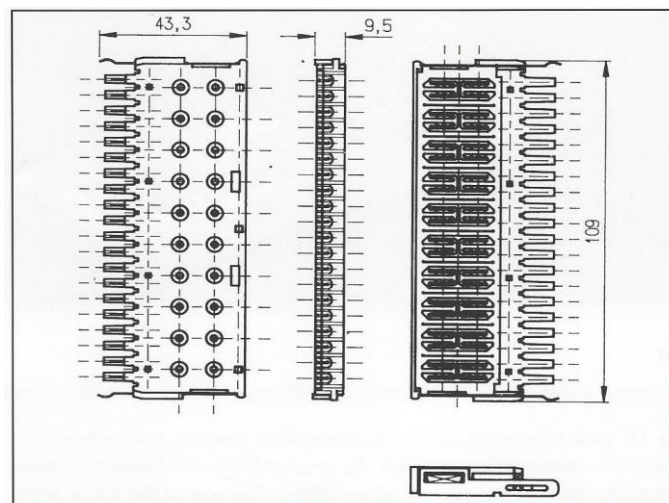

10 PAIR GAS ARRESTER MAGAZINE

Code QCSGAM QCS Series

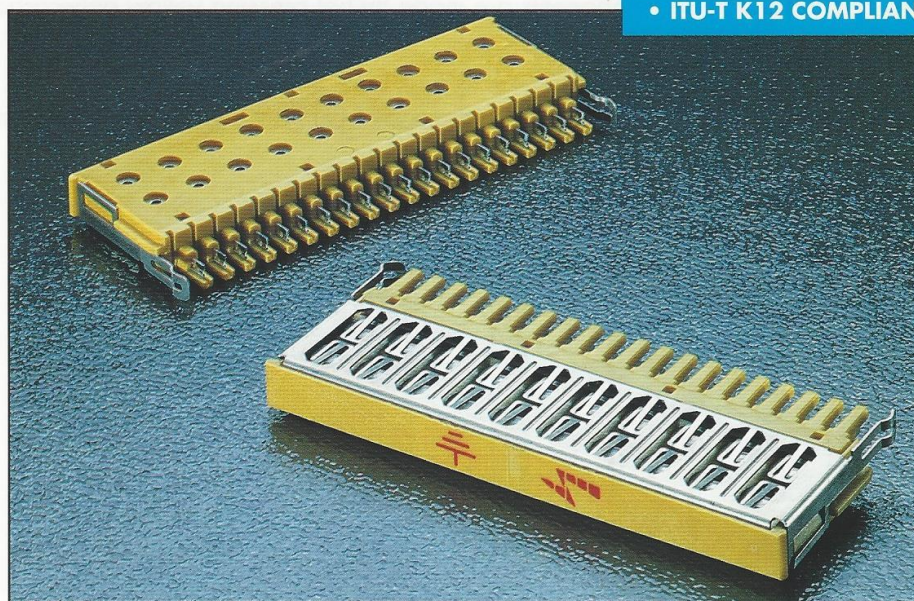

DESCRIPTION

QCSGAM is a 10 pair protection device that provides primary overvoltage protection for QCS and QCSCREW termination modules. Its protects against lightning voltages coming from strong induction, and shorts within power cables. The use of the QCSGAM, within the QCS module, still allows for disconnection and testing of each individual pair, as well as for wire termination on the cross connect side.

The magazine is equipped with 20 bipolar gas discharge tubes, with nominal static spark-over voltage of 250 V and currents of 20A/10kA (QCSGAM - 250). The magazine can be inserted into the appropriate area of QCS and QCSCREW modules without the need of a special tool. Extraction is achieved by the use of a feature the QCSTOOL. Ground connection is through the back mount frame. The magazine can be disassembled in order to individually access the arresters.

The magazine conforms to the Telecom Italia technical specifications N°1287 and N°1288, while the gas arrester conforms to Telecom Italia technical specifications N°1246 as well as to ITU-T recommendation K12.